




> APR400

Ideal for rough materials
Very good printing quality
High resistance to smudge


APR®400 is the newest inkanto wax/resin ribbon for Near Edge and Corner Edge printers. It is dedicated to print rough label materials like uncoated papers or tags, a challenge for TT ribbons. APR®400 achieves a very good printing performance on these materials thanks to its superior coverage capacity. Its high sensitivity enables the highest printing speeds in labeling applications.

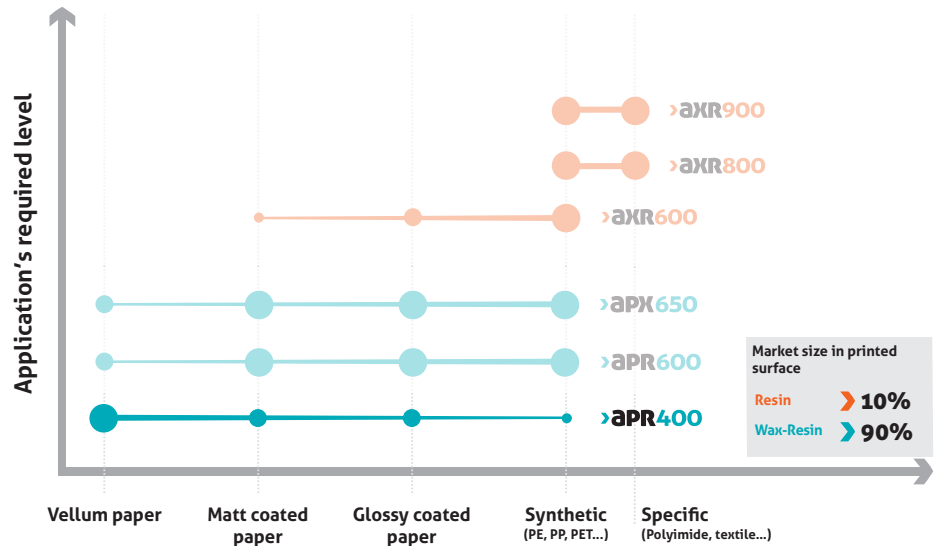


Printing receptor

papers	synthetics
Vellum ●●●	PP ●○○
Coated ●●○	PE ●○○
Glossy coated ●●○	PET ●○○

Printer settings

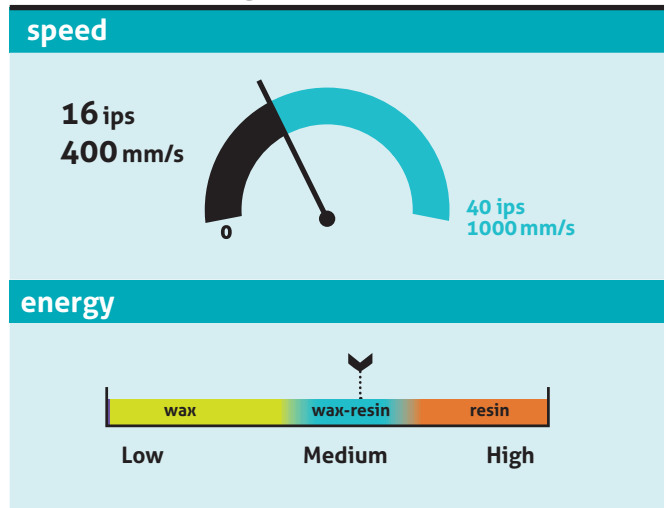

Print resistance

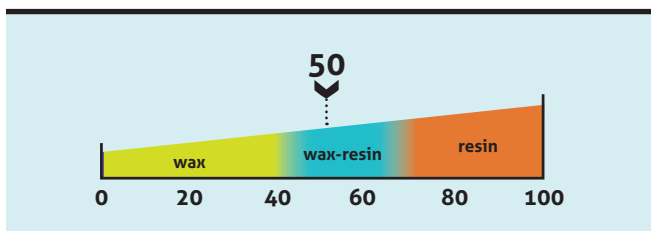

Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
Halogen restrictions

Your ribbon identity

Colours: ●


Length (m):

Width (mm):

Part number:

Your distributor:


Contact :





> APR400

Application fields

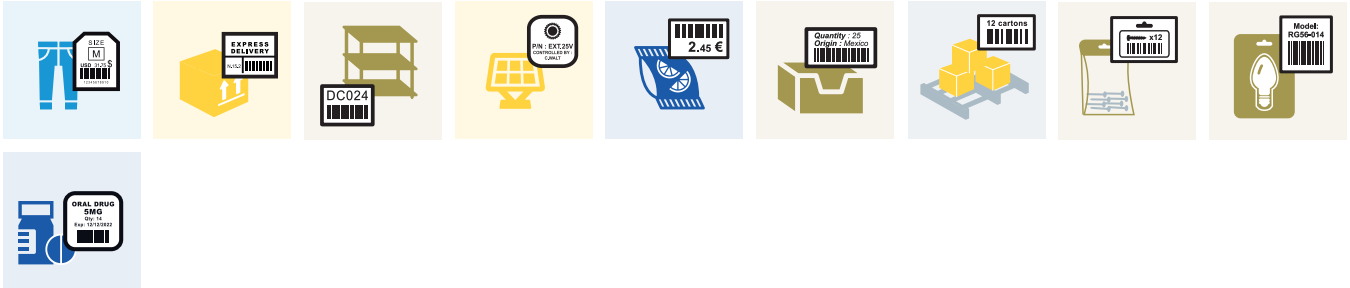


Product performance

print quality					
90°Barcode	80	A _a Small characters	90	Logos	95
0°Barcode	100	2D Barcode	88	Blackness	1,8 ODR*
technical resistances					
Heat	100°C 212°F	Light/Blue Wool	>7	Solvents	100
Water/Submerge	100	Rubbing	60		

Product physico-chemical features

product structure	
PET film	Thickness: 4,5 µm
Ink	Wax-Resin
Melting point	80°C/176°F
Backcoating	Silicon based
Coefficient of Friction	Kd < 0.2
Ribbon thickness	< 8 µm
The ribbon is anti static build-up treated	

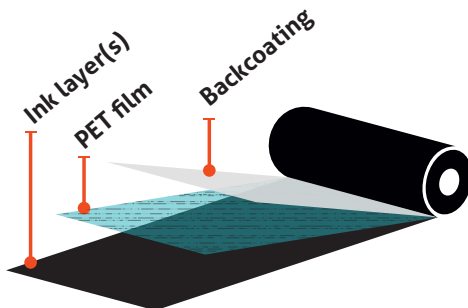

Storage

storage conditions

12 months recommended

20-80 % Humidity Rate, 5-35°C (40-95°F)

Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.